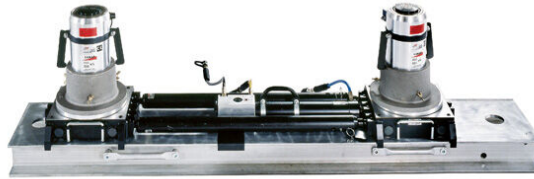


Distance Bars Long

The LUKAS DUO Traversing Unit with integrated locking pin as counterholder enables you to operate the complete working process outside the danger zone without manual repositioning, even with heavy loads. An important part of the DUO Traversing Unit are the adjustable connecting rods. These are available in a short and a long version. To ensure optimum stability without jamming the cylinders, LUKAS uses connecting rods and roller cradles with smooth-running rollers mounted on roller bearings.

Technical Data

Length max: **2800 mm**

Length min: **1500 mm**

Weight: **59 kg**